



EXPAT075

NEW PRODUCT

FRESH WATER SYSTEMS

EXPAT075 – SMOOTHING WATER FLOW

Steady water pressure inside your vessel


An expansion on VETUS pressurized water systems: welcome our EXPAT075! Made from high grade polyamide, this compact small capacity accumulator with rubber membrane provides a constant flow in the vessels water circuit. The pressure in the accumulator prevents the water pump motor being started each time a supply of water is required and the butyl rubber membrane is suitable for drinking water. Connecting is easy as there is no preferred IN or OUT connection on this accumulator.

Compact pressuriser to keep the flow

The EXPAT075 ensures a constant water flow, saves energy and minimizes noise. The accumulator is set to a pre-charge pressure of 0,7 bar, but can be adjusted to optimal settings for your fresh water system (to a maximum of 8,5 bar). Overall dimensions are 223 mm x 194 mm x 114 mm and the accumulator is supplied with two angled and two straight 13 mm hose pillars. The EXPAT075 is available from stock.

Highlights

- Smooths water flow
- Elongates the lifespan of your fresh water pump
- Tank is suitable for confined spaces
- Dampens pulsation in the system
- Dimensions 223 mm x 194 mm x 114 mm (l x w x h)
- Volume: 0,75 litre
- Maximum pressure: 8,5 bar
- Pre-charge pressure: 0,7 bar
- Temperature range: 0 to 50 degrees Celsius
- Connections: ½" NPT Male
- Hose pillars: 13 mm hose
- Weight: 0,36 kg

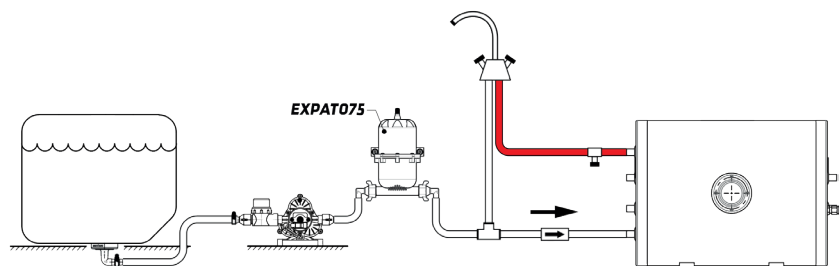

Type	Description	Capacity (l)	Max. pressure (bar)	Connections	Dimensions l x b x h (mm)
EXPAT075	Accumulator Tank	0,75	8,5	13 mm hose	223 x 194 x 114

3 year warranty, unique in the market!

All VETUS boat equipment products come with a 3 year warranty. Because of our long experience, careful choice of materials and stringent quality controls, we have the confidence to offer this warranty. For advice, installation and service you can always rely on our worldwide network of VETUS dealers.

